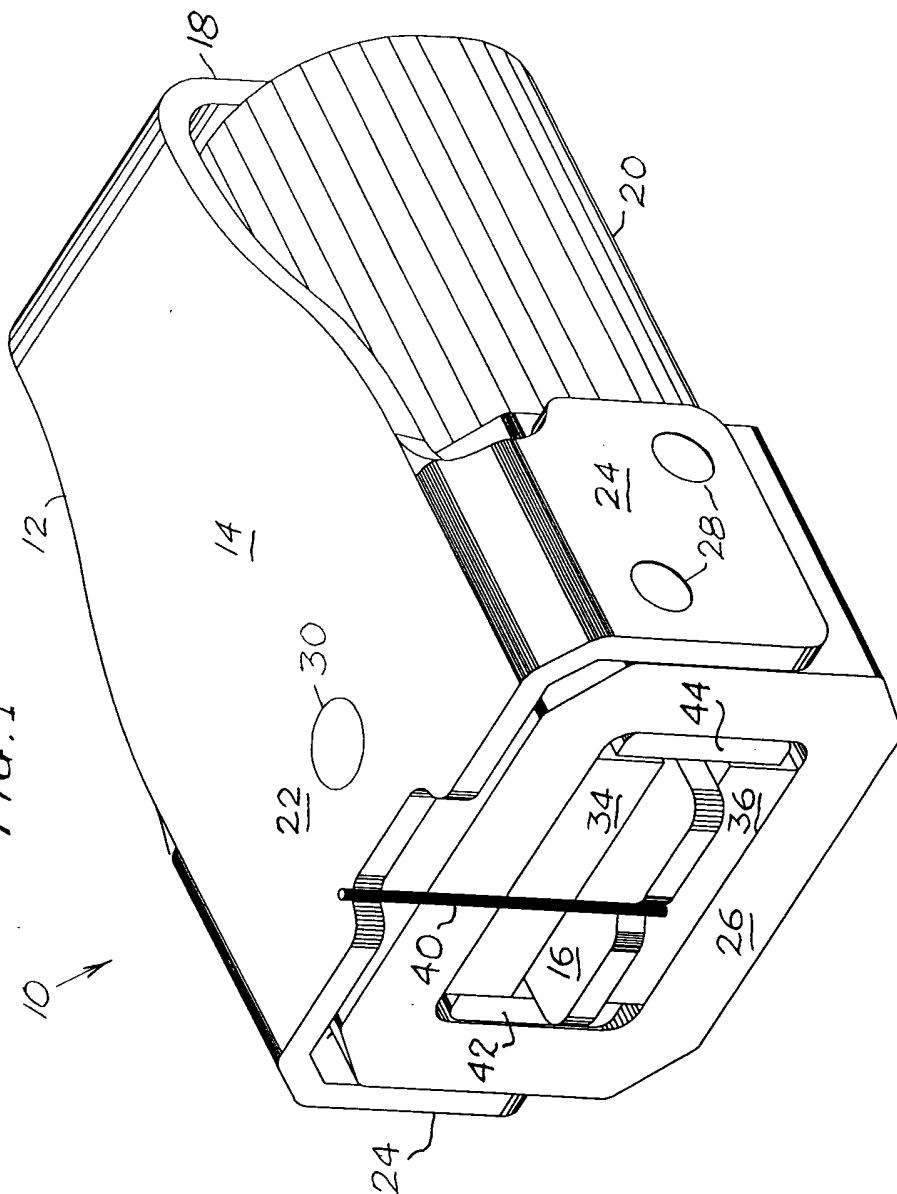


FIG. 1 is a perspective view of a device 10, which is a combination of a first part 12 and a second part 14. The first part 12 is a rectangular plate with rounded corners, and the second part 14 is a rectangular plate with rounded corners. The first part 12 is positioned on top of the second part 14. The first part 12 has a top surface 16 and a bottom surface 18. The second part 14 has a top surface 20 and a bottom surface 22. The first part 12 is connected to the second part 14 by a hinge 24. The hinge 24 is located at one end of the first part 12 and the second part 14. The hinge 24 is a cylindrical hinge. The first part 12 has a handle 26 on its top surface 16. The handle 26 is a rectangular handle. The second part 14 has a handle 28 on its top surface 20. The handle 28 is a rectangular handle. The first part 12 has a hole 30 in its top surface 16. The hole 30 is a circular hole. The second part 14 has a hole 32 in its top surface 20. The hole 32 is a circular hole. The first part 12 has a hole 34 in its bottom surface 18. The hole 34 is a circular hole. The second part 14 has a hole 36 in its bottom surface 22. The hole 36 is a circular hole. The first part 12 has a hole 38 in its bottom surface 18. The hole 38 is a circular hole. The second part 14 has a hole 40 in its bottom surface 22. The hole 40 is a circular hole. The first part 12 has a hole 42 in its bottom surface 18. The hole 42 is a circular hole. The second part 14 has a hole 44 in its bottom surface 22. The hole 44 is a circular hole.

FIG. 1



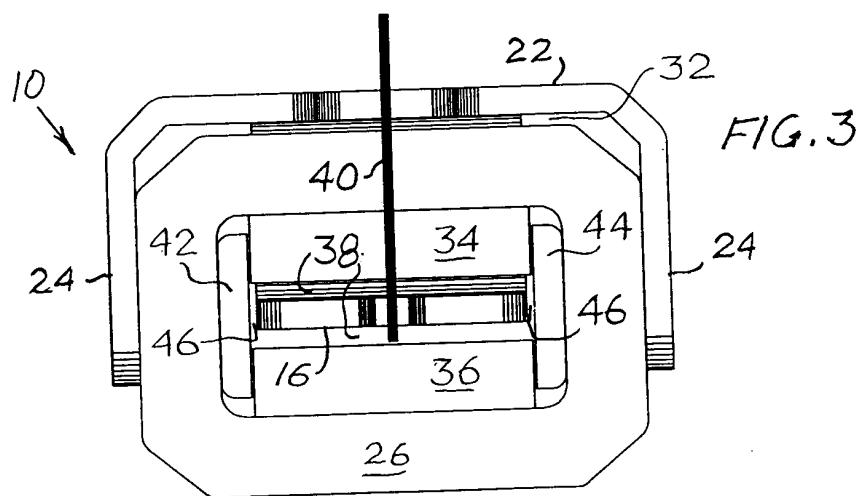
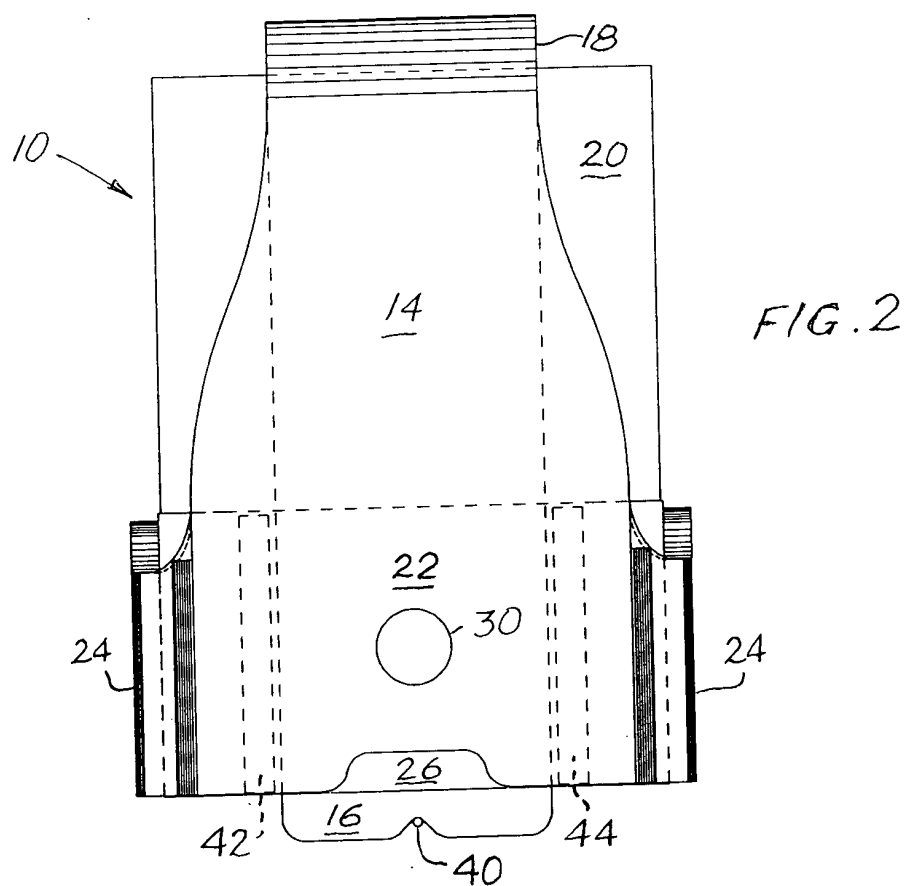


FIG. 4

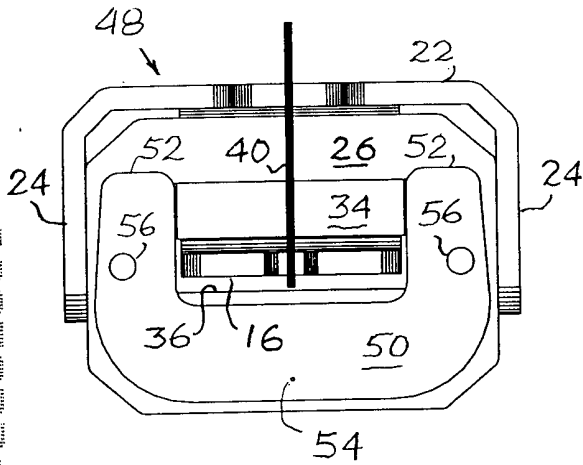


FIG. 5

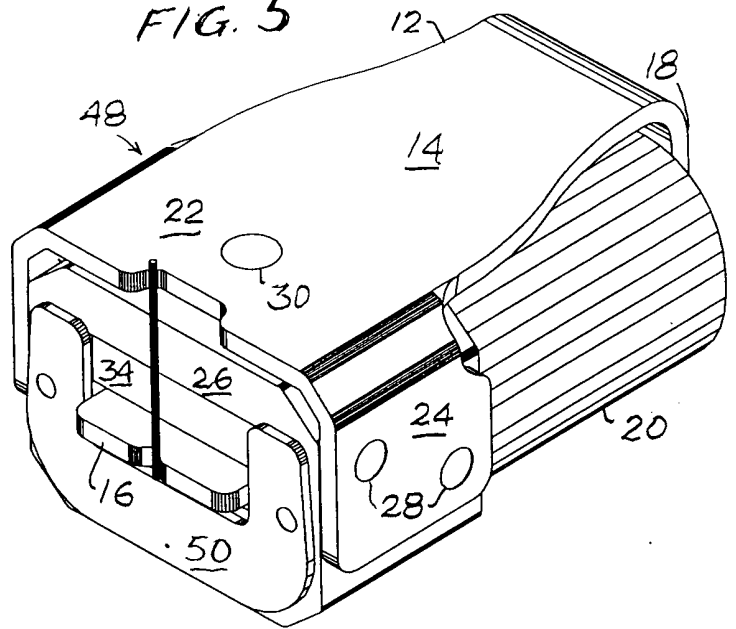


FIG. 6

